

HYDROMETERS

Combination Master
Valve and Water
Meter/Flow Sensor

APPLICATIONS

- For commercial, institutional and sports field irrigation applications
- Ideal for retrofits
- Designed for high pressure, remote operated applications
- Water meter can communicate with irrigation controllers and central control units
- Valve can function as a remote master valve for automated operation

SPECIFICATIONS

- Sizes: 1 1/2", 2", 3", 4", 6" and 8"
- Maximum working pressure:
Manual Electric - 235 psi
- Body: cast iron, polyester coated
- Valve diaphragm: reinforced natural rubber
- Pilot option: manual electric
- End connections:
1 1/2" - male pipe thread
2" - female pipe thread
3", 4", 6" 8" - flanged
- Flanges: drilled according to ANSI specification
- Standards: EEC approval (class A)
- Installation of a continuous acting air vent before the Hydrometer is highly recommended for accurate flow readings

FEATURES & BENEFITS

GLOBE CONFIGURATION WITH BUILT-IN STRAIGHTENING VANE

Requires no straight pipe for installation - saving space.

± 2% ACCURACY ACROSS FLOW RANGES

No more false alarms.

RUGGED, HEAVY DUTY CONSTRUCTION

Cast Iron with corrosion resistant coating.

REGISTERS ARE STAINLESS STEEL/COMPOSITE ENCAPSULATED

Guaranteed against fogging due to moisture.

DOUBLE-CHAMBERED VALVE

Provides quick acting and positive opening and closing.

SUB-METERING

Meter dedicated to landscape irrigation water.



REED SWITCH (RS) REGISTER

The reed switch register is a dry contact or simple switch closure for communicating with control and monitoring equipment. Flows are totaled in U.S. Gallons based on the multiplication factors indicated on the dial face.



PHOTO DIODE HIGH FREQUENCY (PDH) REGISTER

A photo coupler sensor that provides pulse output for communicating with control and monitoring equipment. Flows are totaled in U.S. Gallons based on the multiplication factors indicated on the dial face.



DIGITAL (ER) REGISTER

Combines standard digital register features with dry pulse output for communicating with control and monitoring equipment. Rate of flow and volume readings in U.S. Gallons are clearly indicated on the LCD display.

FRICION LOSS vs. PRESSURE LOSS (psi)


		FLOW RATE (GPM)																												
		1.8	4.4	5.3	14	20	21	53	55	79	95	97	125	150	198	220	250	300	357	380	400	500	700	860	900	950	1000	1250	1500	
SIZE	1 1/2"	0.01	0.04	0.1	0.4	0.8	0.8	5.3	5.7																					
	2"			0.02	0.2	0.3	0.4	2.3	2.5	5.1	7.4	7.7																		
	3"				0.02	0.05	0.1	0.3	0.4	0.7	1.1	1.1	1.8	2.7	4.5	5.7														
	4"						0.02	0.1	0.2	0.3	0.5	0.5	0.8	1.2	2.0	2.5	3.2	4.7	6.6	7.5										
	6"							0.02	0.03	0.05	0.1	0.1	0.1	0.2	0.3	0.4	0.5	0.7	1.1	1.2	1.3	2.1	4.1	6.1						
	8"												0.02	0.02	0.04	0.1	0.1	0.1	0.2	0.2	0.3	0.4	0.4	0.6	1.3	1.9	2.1	2.3	2.6	4.0

±2% Accuracy

±5% Accuracy

PERFORMANCE DATA (GPM)

SIZE	LOWEST FLOW WITHIN ± 5% ACCURACY	LOWEST FLOW WITHIN ± 2% ACCURACY	NOMINAL FLOW WITHIN ± 2% ACCURACY	MAXIMUM FLOW WITHIN ± 2% ACCURACY
1 1/2"	1.8	4.4	44	55
2"	5.3	20	66	95
3"	14	53	176	220
4"	21	79	264	380
6"	53	198	660	860
8"	97	357	1,189	1,500

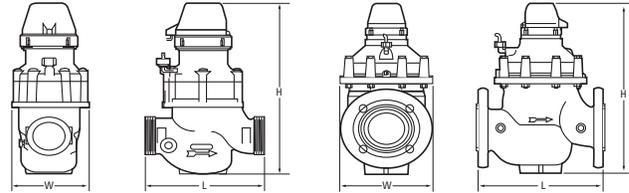

HYDROMETER DIMENSIONS

		SIZE	1 1/2"	2"	3"	4"	6"	8"
GLOBE	LENGTH (L)	6 5/16"	8 11/16"	11 1/4"	14 3/16"	19 11/16"	23 9/16"	
	WIDTH (W)	4 15/16"	4 15/16"	8 1/16"	9"	14 15/16"	17 11/16"	
	HEIGHT (H)	10 7/16"	13"	17"	18 1/16"	24 13/16"	30 11/16"	
	WEIGHT	4 LBS.	7 LBS.	52 LBS.	65 LBS.	245 LBS.	309 LBS.	

ORDERING INFORMATION

METER SIZE	REGISTER OUTPUT TYPE	PULSE PER GALLON	GALLONS PER PULSE	MODEL NUMBER (MANUAL ELECTRIC)
1 1/2"	RS	1	1	LHM15TG1-MEL
	PDH	187.900	0.0053	LHM15TG0053-MEL
	ER	10	0.1	LHM15EM11AAFMEL
2"	RS	1	1	LHM2TG1-MEL
	PDH	117.000	0.0085	LHM2TG0085-MEL
	ER	10	0.1	LHM2EM11AAFMEL
3"	RS	1	1	LHM3FG1-MEL
	PDH	48.710	0.0205	LHM3FG0205-MEL
	ER	10	0.1	LHM3EM11AAFMEL
4"	RS	1	1	LHM4FG1-MEL
	PDH	17.933	0.0566	LHM4FG0566-MEL
	ER	10	0.1	LHM4EM11AAFMEL
6"	RS	0.1	10	LHM6FG10-MEL
	PDH	5.747	0.1741	LHM6FG1739-MEL
	ER	1	1	LHM6EM11AAFMEL
8"	RS	0.1	10	LHM8FG10-MEL
	PDH	3.152	0.317	LHM8FG317-MEL
	ER	1	1	LHM8EM11AAFMEL

Installation Requirements: Globe configuration hydrometers have no straight pipe installation requirements.

Netafim Hydrometers are standard in a manually closed configuration. To order a Normally Open (NO) configuration, call Netafim Customer Service at 1 (888) 638-2346 for ordering information.



NETAFIM USA
CS 888 638 2346
www.netafimusa.com