


SAP DESCRIPTION	:					
MTL SNG 480510 S				<b>V</b> . 14	ETA	rim
SKU No.				THE INFORM DRAWING IS	( AND CONFI ATION CONTA THE SOLE PRO	NINED IN THIS
Maximum Flow Rate	: 1870 GPM			OR AS A WH	IY REPRODUC OLE WITHOUT OF NETAFIM IS	THE WRITTEN
Recommended Flow	Rate: 1540 GPM			Designed By		
Inlet Pressure:	115 PSI			Drawn By	KEREM	25/12/2019
Sheet Size:	Scale:			Checked By		
A4	1:35	to high pressure	TO LOW PRESSURE	QA		
		D.P /	D.P	Sheet: ]	<sup>Of:</sup> 3	Rev



SAP DESCRIPTION	:		4.84		
MTL SNG 480510 S			<b>V.</b> M	ETA	rim
SKU No.			THE INFORM DRAWING IS	( AND CONFIE ATION CONTA THE SOLE PRO	INED IN THIS OPERTY OF
Maximum Flow Rate	: 1870 GPM		OR AS A WH	iy reproduc" Ole without Of netafim is	THE WRITTEN
Recommended Flow	Rate: 1540 GPM		Designed By		
Inlet Pressure:	115 PSI		Drawn By	KEREM	25/12/2019
Sheet Size:	Scale:		Checked By		
A4	1:35	TO HIGH PRESSURE TO LOW PRESSURE	QA	01	
		D.P / D.P	Sheet: 2	<sup>Of:</sup> 3	Rev

ITEM NO.	SAP Description	SAP Cat. No.	QTY.
1	METAL SNG.CHA.PLUS 48"*4" VIC PN08 LONG	71910-001626	5
2	METAL MAN 10"*2 OUT*4" VIC F/48" TANK	71910-002210	4
3	METAL MAN 10"*1 OUT*4" VIC F/48" TANK	71910-002209	2
4	METAL BF MAN 4"*2 OUT*3" VIC F/48" TANK	71910-001712	2
5	METAL BF MAN 4"*1 OUT*3" VIC F/48" TANK	71910-001703	1
6	MET CUP 10"VIC W/2 OUT 2"NPT+1 OUT 1"NPT	71910-001821	2
7	METAL CUP 4" VIC	71910-001792	1
8	NET METAL B.F VALVE 4X3 STRAIGHT VIC	71600-006660	5
9	VICTAULIC COUPLING 3" ONE BOLT	71910-002501	5
10	VICTAULIC COUPLING 4" ONE BOLT	71910-002502	18
11	VICTAULIC COUPLING 10" TWO BOLT	71910-002505	6
12	Control stand + controller + Aquative bracket		1
13	1" CONTROL KIT FOR MEDIA FILTER - NPT	37090-009610	1
14	L.P. Check point (part of control kit)		1
15	BARAK PLASTIC BASE 2 GD-010(NPT)	70561-001500	1
16	support leg 10"-100mm		4
17	SUPPORT LEG 4"-1400MM	71910-001952	1

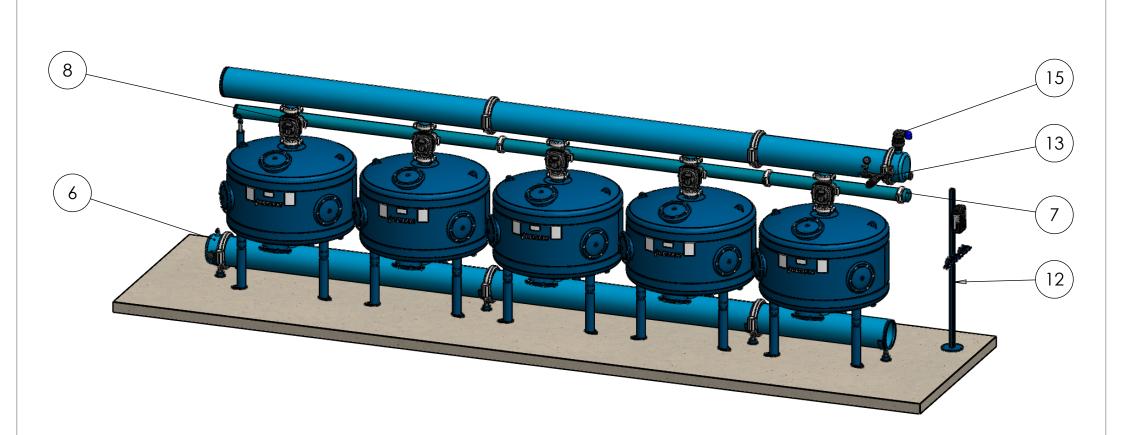